


OPPOSITE SIDE TEMPERATURE _____ ° **ADVISE**

MOUNT SIDE TEMPERATURE _____ ° **ADVISE**


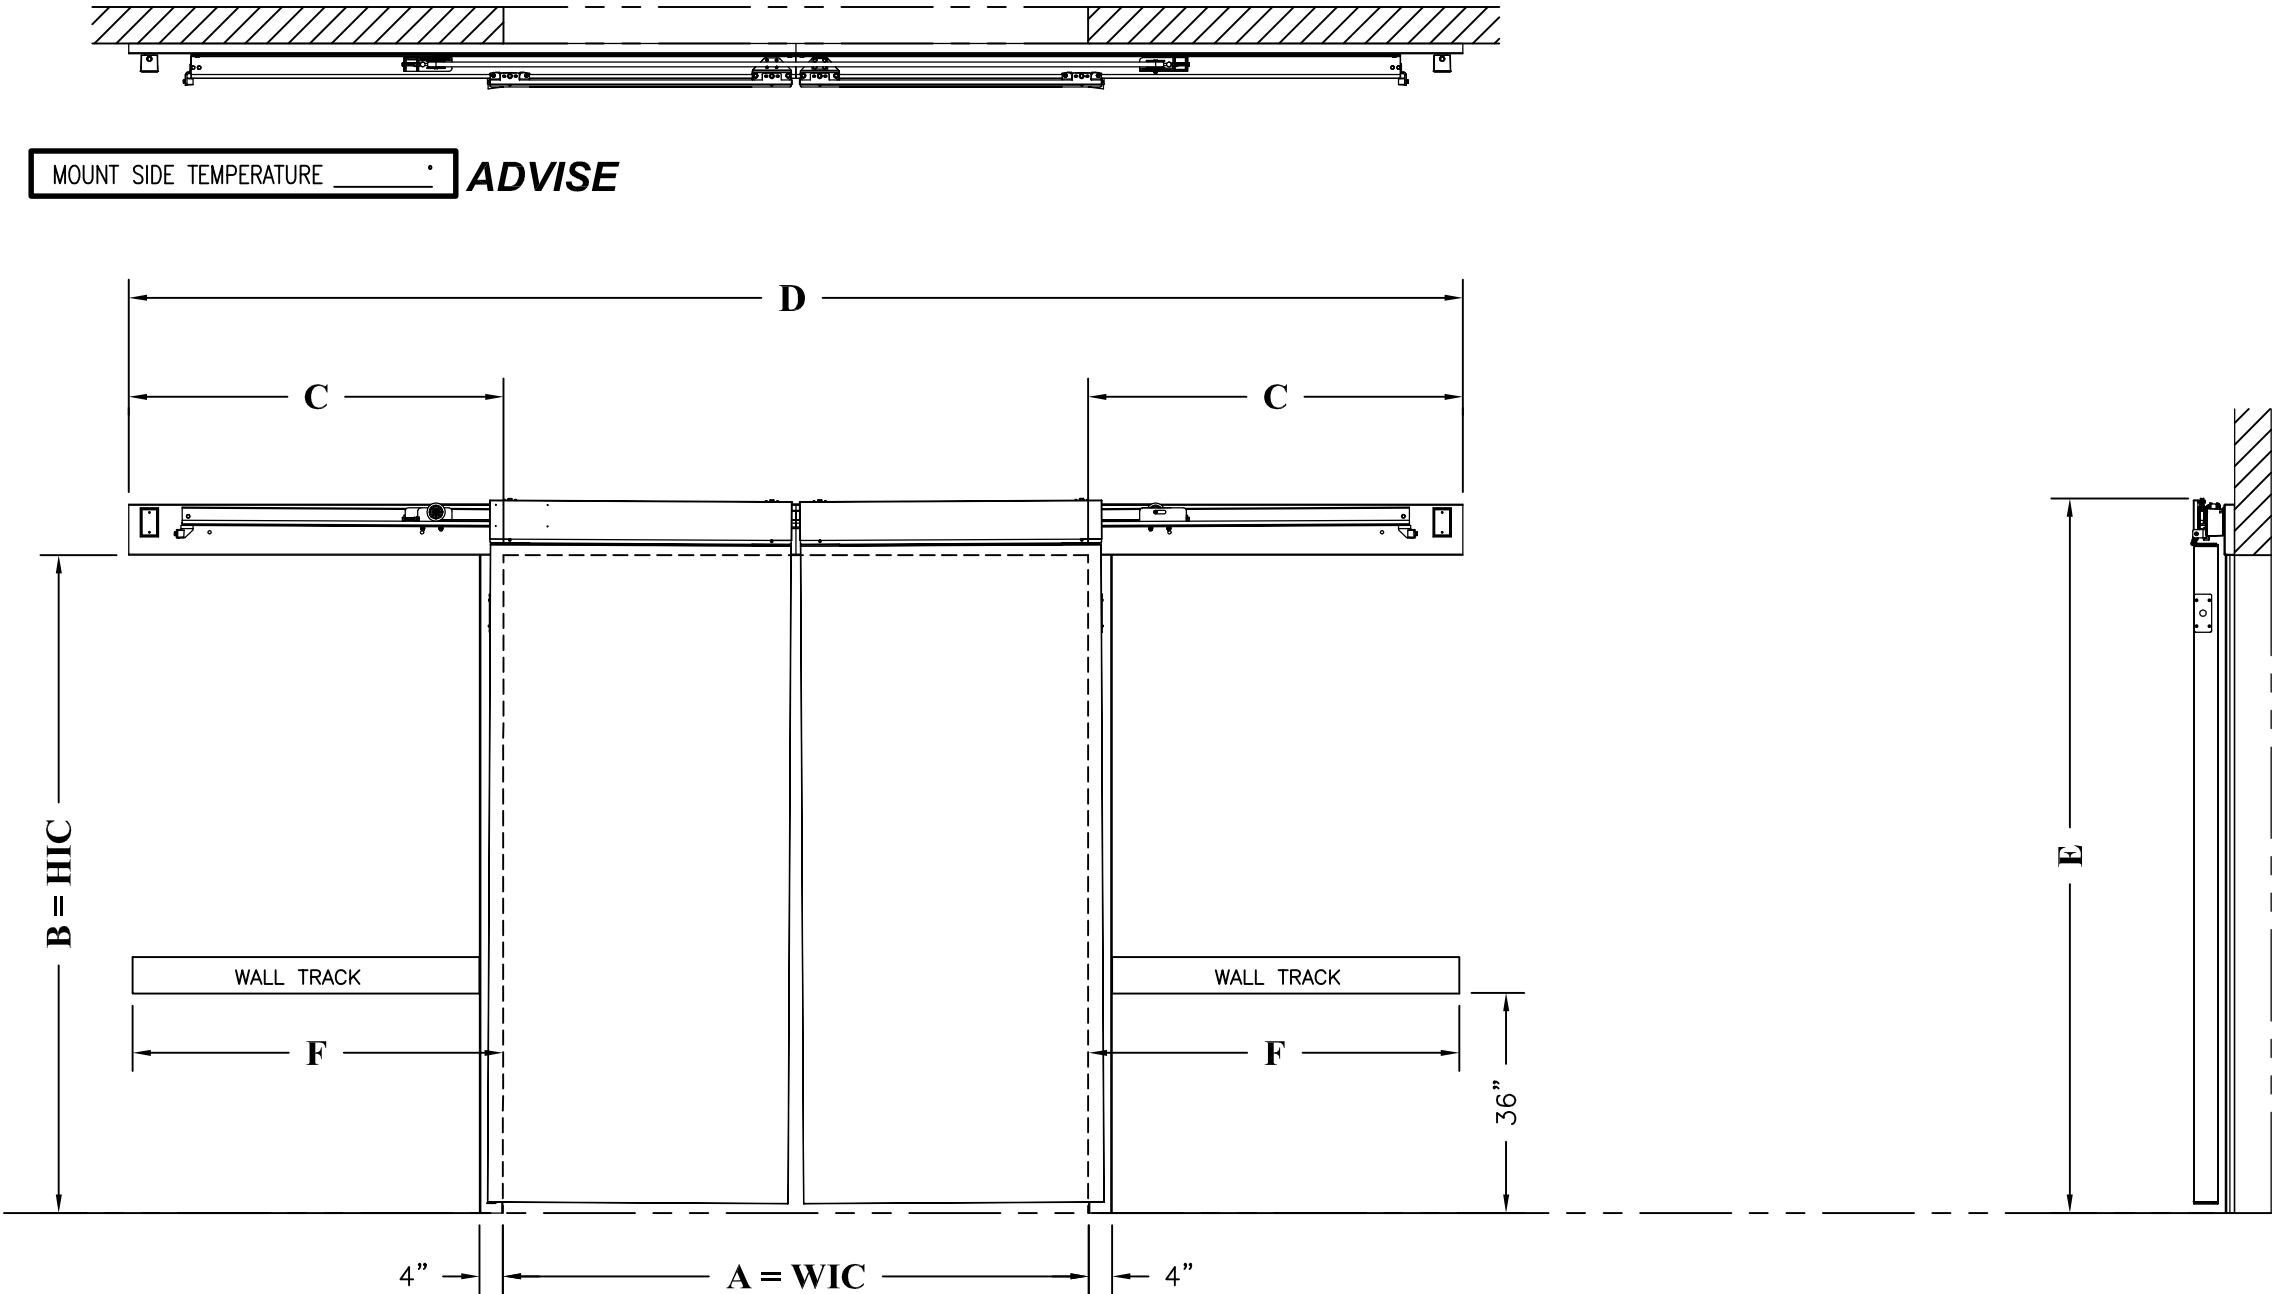


NOTE: MOUNTING HARDWARE BY OTHERS

	DOOR DIMENSIONS		
	BUILD WIC	A	8'-0"
	BUILD HIC	B	10'-0"
	A/2 + 13 1/2"	C	5'-1 1/2"
	2A + 27"	D	18'-3"
MOTOR/CONTROL SYSTEM AMP DRAW	B + 11"	E	10'-11"
	A/2 + 13 1/2"	F	5'-1 1/2"

VOLT/PHASE	RECOMMENDED SERVICE
460/3	2.8 AMPS
230/1	5.5 AMPS
115/1	11 AMPS

NOTE: 230 VAC CONTROLS ARE SET TO WORK WITH EITHER SINGLE PHASE OR 3 PHASE POWER INPUT

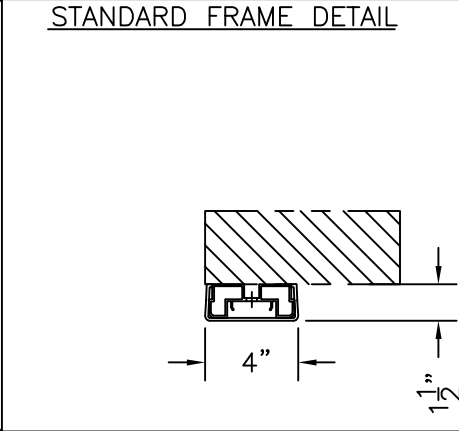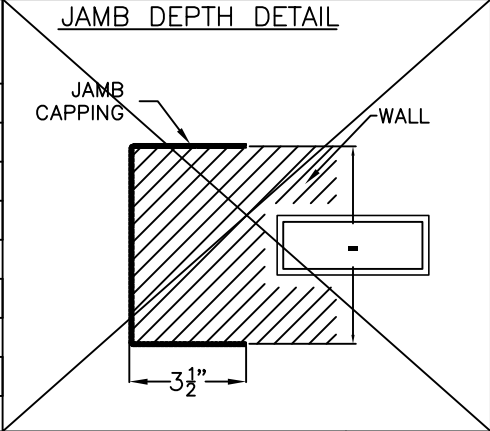

APPLICATION DATA

WASHDOWN ENVIRONMENT: YES ☐ OR NO ☐

ADVISE

OPTIONS

DOOR PANEL MATERIAL:
☒ - ISOFLEX

DOOR PANEL TYPE:
☒ COOLER - 4" THICK

WALL TRACK SYSTEM:
☒ STAINLESS STEEL

FACE FRAME CONSTRUCTION:
☒ ALUMINUM W/POLYPROPYLENE COVERS

HEADER MATERIAL:
☒ ALUMINUM/ZINC/GALVANIZED

OPERATOR TYPE:
☒ NONE - MANUAL DOOR

VOLTAGE:
☒ NONE - MANUAL DOOR

MIRROR HEADER:
☒ - NONE

INSIDE TRIM:
☒ - NONE

JAMB CAPPING:
☒ - NONE

SPECIAL NOTES

TAG DOOR AS:

ADVISE

***** ADVISE *****

* DOOR TAG:

* OPERATOR LOCATION: RIGHT HAND (SHOWN), LEFT IS OPPOSITE

* VOLTAGE: 115V OR 230V 1ø

* APPLICATION DATA: WASHDOWN ENVIRONMENT - YES OR NO?

* MOUNT SIDE TEMP: _____ °

* OPPOSITE SIDE TEMP: _____ °

APPROVAL DRAWING

ASIDOORS

5848 North 95th Court
Milwaukee, WI 53225
1-800-558-7068
www.asidoors.com

TITLE

BI-PART ISOFLEX SLIDING DOOR,
MANUAL, 4" COOLER

DRAWN BY

DATE

SHEET
1 OF

DRAWING NO.

REV.

APPROVALS

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED.

BY _____ DATE _____

ASI JOB NUMBER:

CUSTOMER ORDER NUMBER:

SOLD TO:

END USER:

QUANTITY OF DOORS:

DOOR MODEL NO: XP 2200

DOOR ASSEMBLY NO: 90B0009

ELECTRICAL DRAWING NO: