


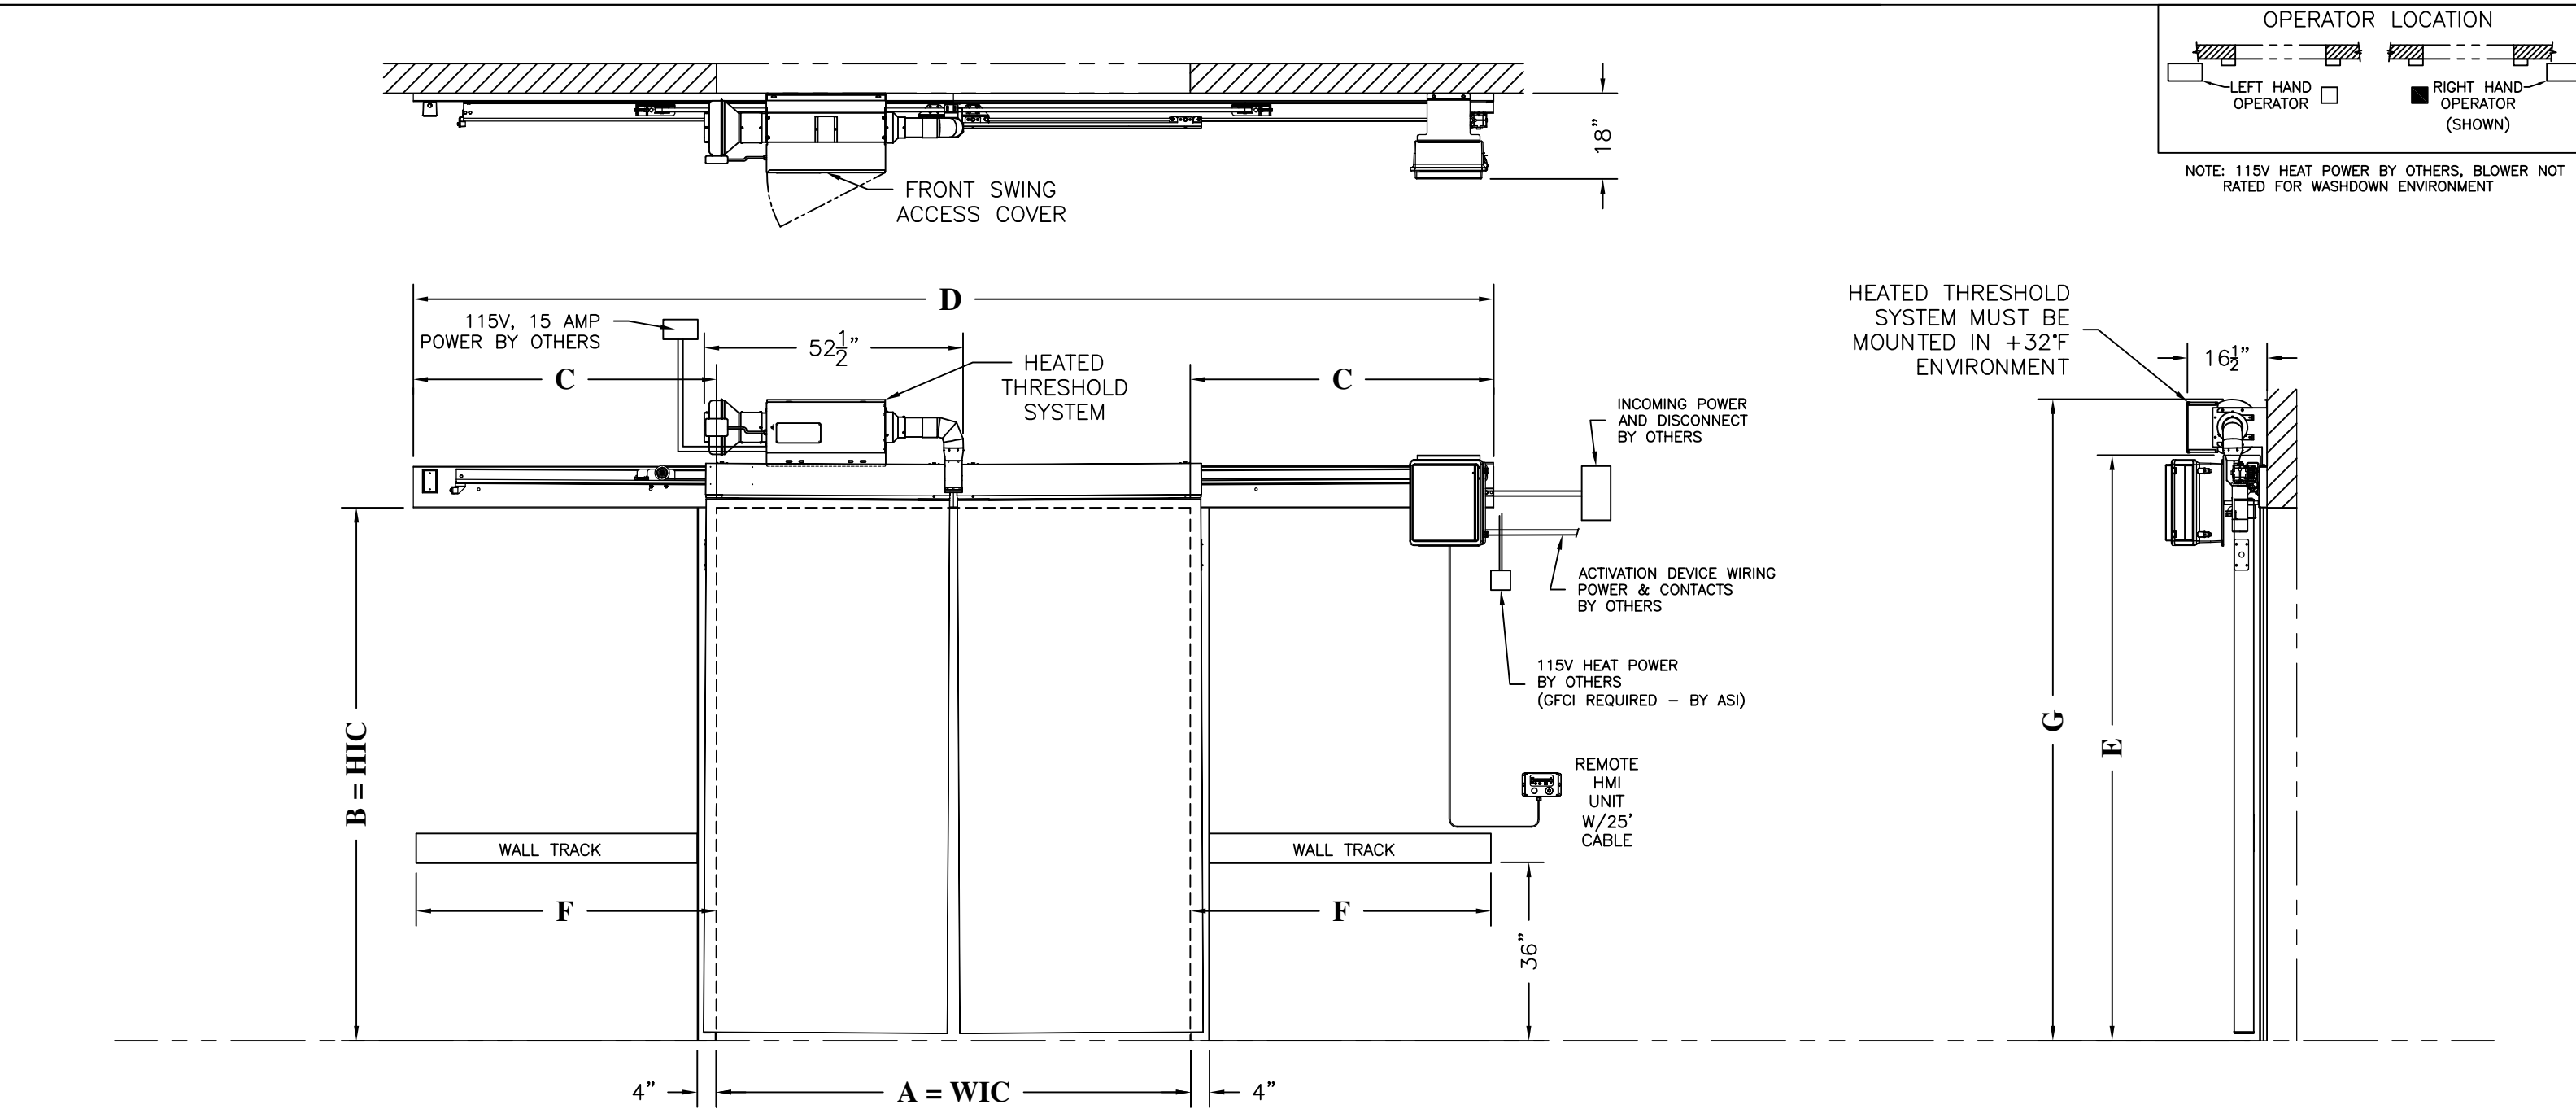

NOTE: MOUNTING HARDWARE BY OTHERS

HEATED THRESHOLD SYSTEM AMP DRAW

15 AMPS @ 115V

NOTE: 115V HEAT POWER BY OTHERS, BLOWER NOT RATED FOR WASHDOWN ENVIRONMENT

HEAT SYSTEM AMP DRAW

AMPS @ 115V

NOTE: 115V HEAT POWER BY OTHERS (GFCI REQUIRED)

MOTOR/CONTROL SYSTEM AMP DRAW

VOLT/PHASE	RECOMMENDED SERVICE
460/3	2.8 AMPS
230/1	5.5 AMPS
115/1	11 AMPS


NOTE: 230 VAC CONTROLS ARE SET TO WORK WITH EITHER SINGLE PHASE OR 3 PHASE POWER INPUT.

DOOR DIMENSIONS

NOTE: DOOR DETAIL NOT TO SCALE

BUILD WIC	A	
BUILD HIC	B	
A/2 + 13 1/2"	C	
2A + 27"	D	
B + 11"	E	
A/2 + 13 1/2"	F	
B + 22 1/2"	G	

STANDARD FRAME DETAIL



NOTE: DOOR DETAIL NOT TO SCALE

RIGHT HAND SLIDE SHOWN
MIRROR DIMENSIONS FOR LEFT HAND SLIDE

DOOR MODEL NO: ISO-Flex
DOOR ASSEMBLY NO: XP2200



5848 North 95th Court
Milwaukee, WI 53225
1-800-558-7068
www.asidoors.com

TITLE ISO-FLEX BI-PART				
DRAWN BY	DATE	SHEET 1 OF	DRAWING NO.	REV.