



OPEN UP TO WHAT'S POSSIBLE

# MODEL XP 2000

## Bi-Part Sliding Cooler / Freezer Door System

Manual / Power

### THE COLD STORAGE INDUSTRY'S TOP PERFORMING VALUE ENHANCED DOOR SYSTEM

The accelerated rate of change in the cold storage industry, coupled with ever increasing energy costs and competitive market forces, has put greater pressure on facility budgets. Performance and value have become inseparable key words for warehousing and food / beverage production worldwide. Companies providing refrigerated environments face new challenges within their facilities as they strive for higher productivity at lower operational costs. The XP series of doors provides an exceptional solution to these new challenges.

Superior speed, uncompromising quality, solid reliability and unmatched value define the XP doors. Designed from the ground up to far exceed the offerings of other door manufacturers, yet priced to meet demanding budget constraints, the XP series of doors will surely become the standard for the “next generation” of cold storage door solutions.



#### HIGH SPEED

With door opening speeds up to 100 feet per second, the XP door provides unmatched productivity, material handling efficiency and energy cost savings.

#### TIGHTEST SEAL

Utilizing a full perimeter non-marking gasket system, and “down and in” track design, XP doors provide superior sealing without compromising gasket longevity.

#### ULTIMATE DURABILITY

Seamless rail system provides a self-cleaning, virtually frictionless surface for our lubed for life nylon roller wheels. A high torque synchronous drive belt, tested millions of cycles requires no lubrication.

#### EXCEPTIONALLY CLEAN

The XP has no chains and requires no lubrication. Nylon rollers run at high speed across a rod track system eliminating shedding. Complete woodless construction eliminates fibrous contamination.

#### IMPACTABILITY

With optional wall mounted guidance system and a pivoting head capability, the XP door can be impacted from the back side without floor hardware and carrier damage. The auto-reset feature insures door panels return to a fully sealed position. Full perimeter casing heat system eliminates costly damage associated with door impacts.

#### LOW MAINTENANCE

The XP door system requires no lubrication, has no metal-to-metal contact, eliminating wearing surfaces and downtime.

## DESIGN AND CONSTRUCTION

### DOOR SIZES

- Minimum: 5' x 7'
  - Maximum: 10' x 14'
- (Other sizes available - consult factory.)

### PANEL CONSTRUCTION

- Sealed design
- 4" panel thickness (Optional 5.5")
- White metal construction
- Full perimeter heat (Freezer Model Only)

### OPERATION

- Powered model has high speed electromechanical operator. (Open-Speeds up to 100"/sec. - Close - up to 50"/sec.).
- 115/230 volt AC, single phase, or 460 volt AC, 3-phase
- DC motor with clutchless / brakeless operation
- Encoded self-calibrating limit position
- Standard motor / encoder IP65 rated
- Remote HMI digital display with self-diagnostics, history function and fault indicators

### INSULATION

- 4" poured polyurethane foam
- 4" panel - R-30 rated
- "K" factor of .12 at 75°F

### PERFORMANCE FEATURES

- Torque sensing stop/reverse full height of door panels
- Header mounted control box with pre-wired remote digital display
- Pre-wired motor and encoder
- LED indicators in control box for door status

### OPTIONS


- Manual operation
- Stainless steel construction
- Windows
- Breakaway wall retention track
- Colored metal
- Padlocking

### (POWER DOORS ONLY)


- Actuators: Pull cord, push button, photo eye, radio control, loop detector, motion detector
- Pre-announce to close kit (LED light bar)
- Standard operation - (2) pull cords or (2) push buttons with time delay close
- Standard operation - activate open time delay close

### WARRANTY

- One year limited warranty on all components

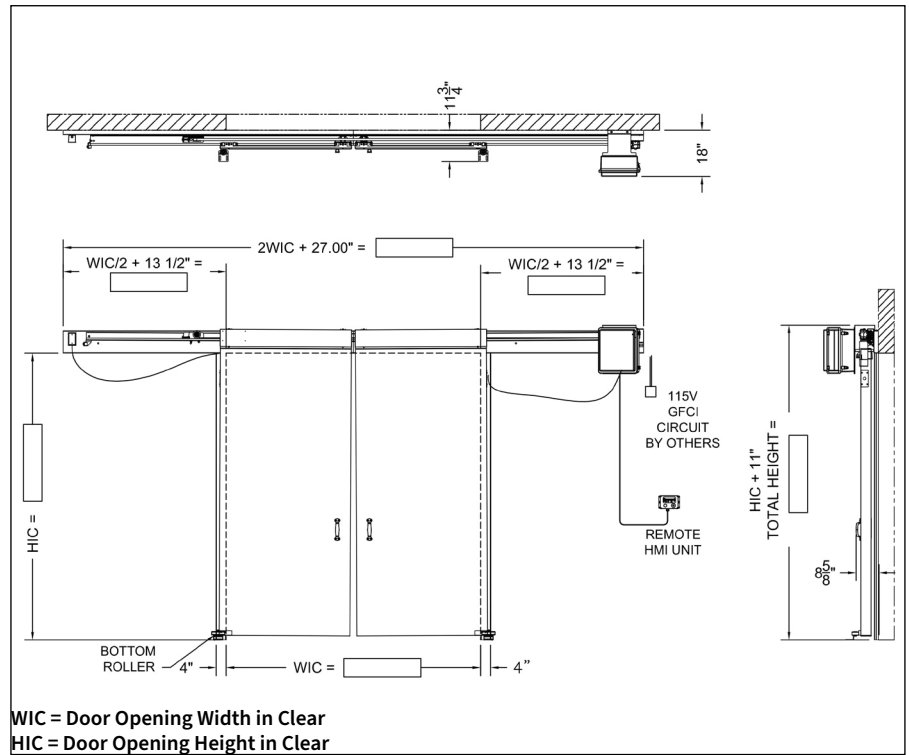

Remote HMI Digital Display

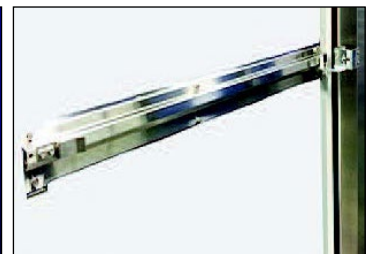

Optional Stainless Steel Breakaway Wall Track