ADVISE

OPPOSITE SIDE TEMPERATURE _____ °

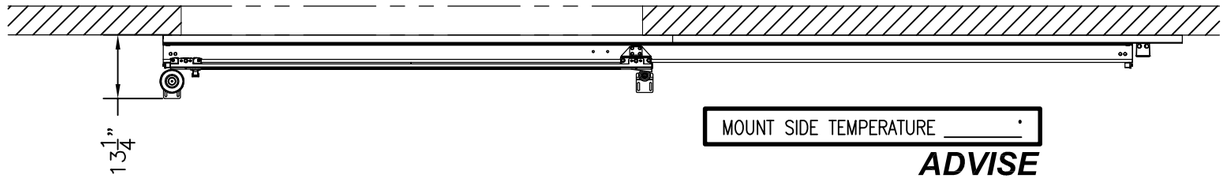

MOUNT SIDE TEMPERATURE _____ °

ADVISE

SLIDE DIRECTION



PANEL SLIDE DIRECTION: ☐ LEFT HAND

■ PANEL SLIDE DIRECTION: RIGHT HAND (SHOWN)

OPTIONS

DOOR PANEL MATERIAL: ■ – WHITE STUCCO ☐ – FIBERGLASS ☐ – 304 #4 STAINLESS STEEL	
DOOR PANEL TYPE: ■ FREEZER – 4" THICK	EXTERIOR DOOR HANDLE TYPE: ■ CHROME
FLOOR ROLLER SYSTEM: ■ ZINC	FACE FRAME CONSTRUCTION: ■ ALUMINUM W/POLYPROPYLENE COVERS
HEADER MATERIAL: ■ ALUMINUM/ZINC/GALVANIZED	
OPERATOR TYPE: ■ NONE – MANUAL DOOR	
VOLTAGE: ■ NONE – MANUAL DOOR	
MIRROR HEADER: ■ – NONE	
INSIDE TRIM: ■ – NONE	
JAMB CAPPING: ■ – NONE	
KICKPLATE: ■ – NONE – INSIDE ■ – NONE – OUTSIDE	

SPECIAL NOTES

TAG DOOR(S) AS: ***ADVISE***

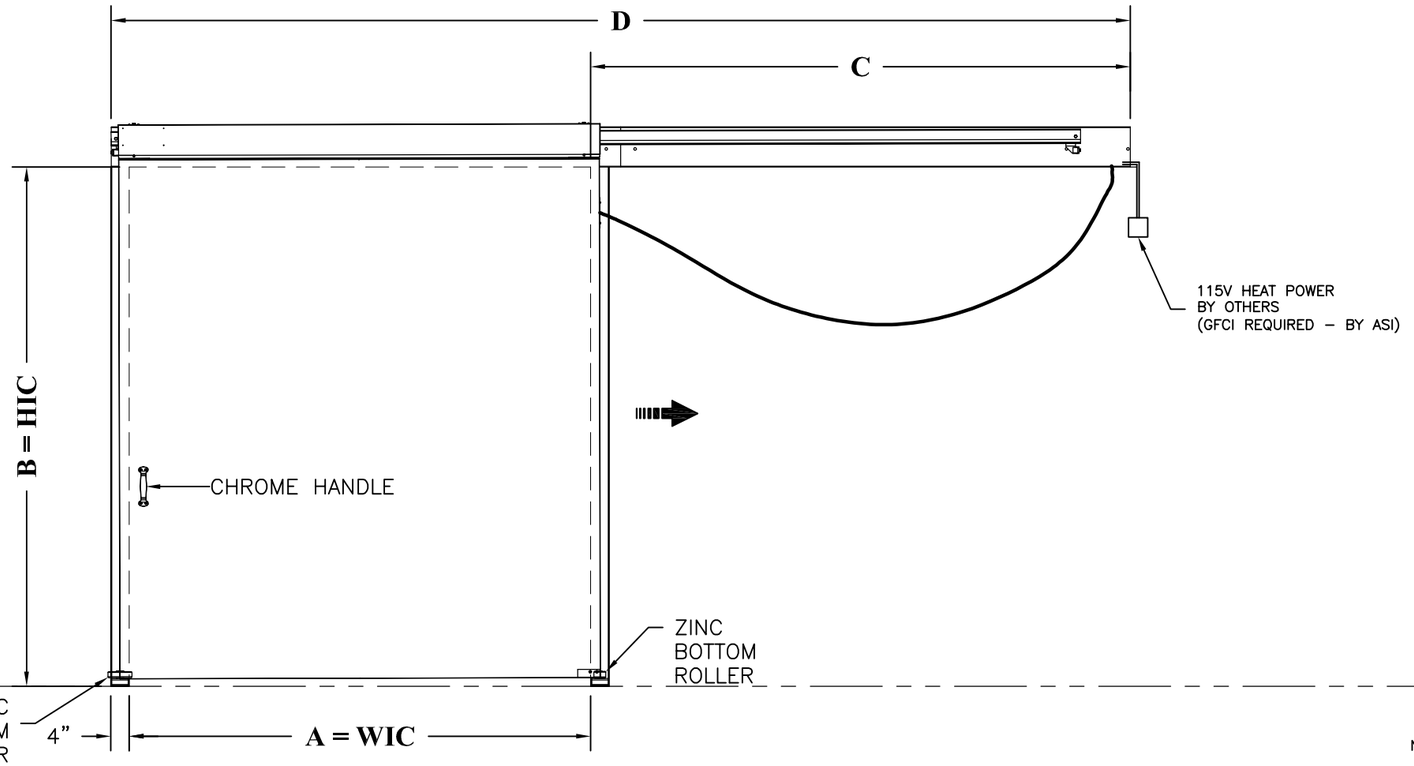

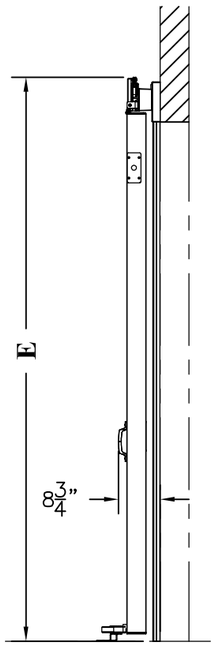

NOTE: MOUNTING HARDWARE BY OTHERS

APPLICATION DATA **ADVISE**

WASHDOWN ENVIRONMENT: YES ☐ OR NO ☐

NOTE: MOUNTING HARDWARE BY OTHERS

HEAT SYSTEM AMP DRAW

_____ AMPS @ 115V

NOTE: 115V HEAT POWER BY OTHERS (GFCI REQUIRED)

MOTOR/CONTROL SYSTEM AMP DRAW

VOLT/PHASE	RECOMMENDED SERVICE
460/3	2.8 AMPS
230/1	5.5 AMPS
115/1	11 AMPS

NOTE: 230 VAC CONTROLS ARE SET TO WORK WITH EITHER SINGLE PHASE OR 3 PHASE POWER INPUT.

DOOR DIMENSIONS

BUILD WIC	A	8'–0"
BUILD HIC	B	10'–0"
A + 16 1/2"	C	9'–4 1/2"
2A + 20"	D	17'–8"
B + 11"	E	10'–11"

JAMB DEPTH DETAIL

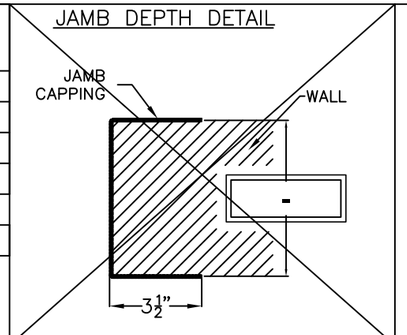

STANDARD FRAME DETAIL



********** **ADVISE** **********

* DOOR TAG:
* SLIDE DIRECTION: RIGHT HAND (SHOWN), LEFT HAND IS OPPOSITE
* VOLTAGE: 115V OR 230V, 1ø
* APPLICATION DATA: WASHDOWN ENVIRONMENT – YES OR NO?
* MOUNT SIDE TEMP: _____ °
* OPPOSITE SIDE TEMP: _____ °

APPROVAL DRAWING

ASI DOORS

5848 North 95th Court
Milwaukee, WI 53225
1–800–558–7068
www.asidoors.com

APPROVALS

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED.

BY _____ DATE _____

ASI JOB NUMBER:
CUSTOMER ORDER NUMBER:
SOLD TO:
END USER:

QUANTITY OF DOORS:
DOOR MODEL NO: XP 2502
DOOR ASSEMBLY NO: 91B0001
ELECTRICAL DRAWING NO:

TITLE: SINGLE SLIDE DOOR, RIGHT HAND, MANUAL, 4" FREEZER

DRAWN BY	DATE	SHEET	DRAWING NO.	REV.
		1 OF		